


# maratodd

## L I G H T I N G

## FIXTURE TYPE B R A N D T

155 West 3rd St • New Richmond, WI 54017  
p: 715.246.2233 f: 715.246.2243  
www.maratodd.com

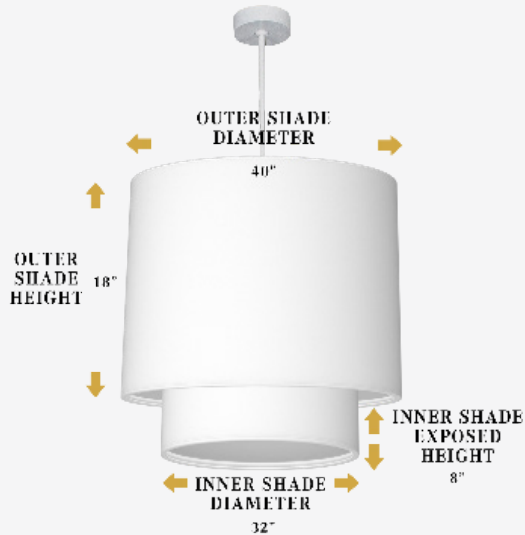

## B R A N D T

DATE	
ITEM #	MT-BRANDT
PROJECT	
COMMENTS	
PREPARED BY	

## D E S C R I P T I O N

Double Tier Drum Pendant Light

## S P E C I F I C A T I O N F E A T U R E S

### MATERIAL / MOUNTING

Cold-rolled steel frame wire body.  
Matte white acrylic bottom diffuser (Optional).

### SHADES

Solid cold-rolled steel construction.  
Material on heavy translucent white styrene with your choice of the coverings opacity.

### FINISH

Standard: White (WHI)  
Premium: Nickel (NIC), Brass (BRA), Black (BLA), Ivory (IVO), Oil-Rubbed Bronze (ORB)

### ACRYLIC DIFFUSER

Our standard acrylic is 7328 White with a thickness of 0.118. Custom colors are available, but may impact extended lead time and standard price.

### LIGHTING

5-way, standard socket cluster. Works with incandescent or LED bulbs.

### INSTALLATION

Easy-to-install universal swivel socket to attach to standard 4" junction box. 120V power.

Cleaning Recommendation: Use a soft cloth brush or a vacuum brush to dust the outside of the lamp shade and a clean soft white flannel cloth for the inside of the lampshade.

### OPTIONS

Contact factory for NFP701 Fire Resistant or Stain Guard Fabric coating.

### USAGE

Approved for interior locations only.

### MODIFICATIONS

Maratodd's skilled craftspeople, with their depth of experience, offer the designer the flexibility to modify standard luminaries for project-specific solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors or decorative detailing.

## ORDERING INFORMATION

Please fill in all **gold highlighted** areas for complete specification.  
Pre-selected values may also be modified, if required.

## BRANDT

### SERIES

BRANDT: Double Tier Drum  
Pendant Light

40		18	SRS		
<u>OUTER SHADE DIAMETER</u>	<u>OUTER SHADE HEIGHT</u>	<u>CANOPY TYPE</u>	<u>CANOPY COLOR</u>	<u>STEM COLOR</u>	
32	8	SRS: Swivel Rigid Stem	STANDARD	3/8" Round Steel	
		FC: Flex Cord	WHI: White	STANDARD	
<u>INNER SHADE DIAMETER</u>	<u>INNER SHADE EXPOSED HEIGHT</u>	AC: Aircraft Cable with Flex Cord	PREMIUM	ST-WHI: White	
			NIC: Nickel	PREMIUM	
IN INCHES 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60	IN INCHES 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60		BRA: Brass	ST-NIC: Nickel	
			BLA: Black	ST-BRA: Brass	
			IVO: Ivory	ST-BLA: Black	
			ORB: Oil-Rubbed Bronze	ST-IVO: Ivory	
				ST-ORB: Oil-Rubbed Bronze	
		A		5	
<u>LAMPSHADE OPACITY</u>	<u>LAMPSHADE COVERING</u>	<u>ACRYLIC DIFFUSER</u>	<u>HEIGHT FROM CEILING TO SHADE BOTTOM</u>	<u>LAMPING</u>	
OPAQUE: Features an interior light-blocking layer to make shade opaque. (No light passes through the sides of the shade)	STANDARD (Some Examples) L-CRE: Linen Cream L-WHI: Linen White	A: With Acrylic Diffuser FBD: With Fabric Diffuser	IN INCHES Specify the Length 6, 8, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, or CUSTOM	Specify Number of Light Sockets 1, 2, 3, 5	
TRANSLUCENT: Shade covering allows some light to shine through. Vertical bars are exposed.	PREMIUM (Some Examples) DL-OFF: Designer Linen Off-White VC-WHI: Vinyl Coated White	NA: Without Acrylic Diffuser			
VERTICAL TRIM: 1/2" trim applied to shade exterior over vertical support bars to hide shadows.			CUSTOM: Enter Actual Measurement in Inches	<u>BULBS</u> Number of Bulbs Depends on Socket 9W2700: 800 Lumens 2,700K 15W2700: 1,600 Lumens 2,700K NA: No Bulbs	