


# maratodd

## L I G H T I N G

**FIXTURE TYPE**  
**DAVID SQUARE-RECTANGLE-OVAL**  
**FLEX CORD**  
 www.maratodd.com

### DAVID

DATE	
ITEM #	MT-DAVID-SQUARE-RECTANGLE-OVAL-FLEX CORD
PROJECT	
COMMENTS	
PREPARED BY	

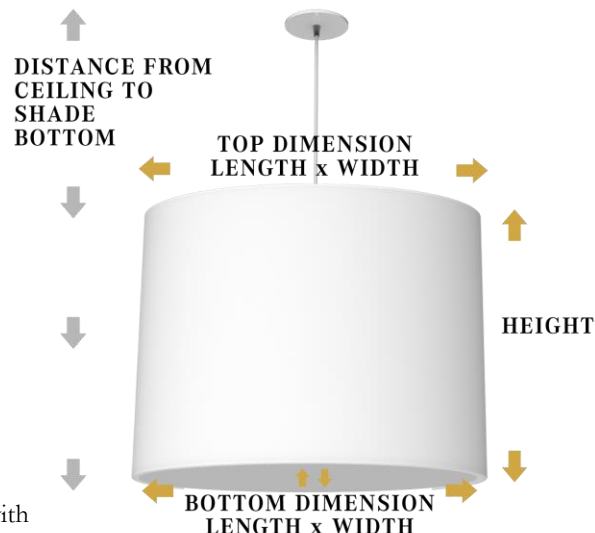

### DESCRIPTION

DAVID Square/Rectangle or Oval Pendant Light with Flex Cord Suspension Style with Optional Aircraft Cable.

### SPECIFICATION FEATURES

#### MATERIAL / MOUNTING

Cold-rolled steel frame wire body. Matte white acrylic bottom diffuser (Optional).

#### SHADES

Solid cold-rolled steel construction. Material on heavy translucent white styrene with your choice of the covering's opacity.

#### FINISH

Standard: White (WHI)  
 Premium: Nickel (NIC), Brass (BRA),  
 Black (BLA), Ivory (IVO), Oil-Rubbed  
 Bronze (ORB)

#### ACRYLIC DIFFUSER

Our standard acrylic is 7328 White with a thickness of 0.118. Custom colors are available but may impact extended lead time and standard price.

#### LIGHTING

Standard socket available in multiple configurations. Works with incandescent or LED bulbs.

#### INSTALLATION

Easy-to-install universal swivel socket to attach to standard 4" junction box. 120V power.  
 Cleaning Recommendation: Use a soft cloth brush or a vacuum brush to dust the outside of the lamp shade and a clean soft white flannel cloth for the inside of the lampshade.

#### OPTIONS

Contact factory for NFP701 Fire Resistant or Stain Guard Fabric coating.

#### USAGE

Approved for interior locations only.

#### MODIFICATIONS

Maratodd's skilled craftspeople, with their depth of experience, offer the designer the flexibility to modify standard luminaries for project-specific solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors or decorative detailing.

## ORDERING INFORMATION

Please fill in all **gold highlighted** areas for complete specification.  
Pre-selected values in black may also be modified, if required.

### DAVID SQUARE-RECTANGLE-OVAL FLEX CORD

#### SERIES

DAVID: Square-Rectangle-Oval Pendant Light

24 X 24	12	FC	2		
<u>SHADE TOP DIMENSION</u> Even numbers only in inches, minimum 6" with maximum of 84"	<u>SHADE HEIGHT</u> Numbers only in inches, minimum 4" with maximum of 40"	<u>SUSPENSION STYLE</u> FC: Flex Cord Only AC: Aircraft Cable Option	<u>SOCKET</u> Single	<u>BRIGHTNESS</u> <u>9W</u> 800 Lumens	<u>15W</u> 1,600 Lumens
<b>24 X 24</b>		Note: Optional on fixtures up to 38" in diameter <b>Required</b> on fixtures with diameter of 40"+	Double Triple 5-Bulb	1,600 Lumens 2,400 Lumens 4,000 Lumens	3,200 Lumens 4,800 Lumens 8,000 Lumens
<u>SHADE BOTTOM DIMENSION</u> Even numbers only in inches, minimum 6" with maximum of 84"				<u>COLOR TEMPERATURE</u> 2,700K - Warm White 3,000K – Soft White	
<u>DISTANCE FROM CEILING TO SHADE BOTTOM</u> In inches, up to 192"	<u>CANOPY COLOR</u> STANDARD WHI: White  PREMIUM NIC: Nickel BRA: Brass BLA: Black IVO: Ivory ORB: Oil-Rubbed Bronze	<u>LAMPSHADE OPACITY</u> OPAQUE: Features an interior light-blocking layer to make shade opaque. (No light passes through the sides of the shade)  TRANSLUCENT: Shade covering allows some light to shine through. Vertical bars are exposed.  VERTICAL TRIM: 1/2" trim applied to shade exterior over vertical support bars to hide shadows.	<u>LAMPSHADE COVERING</u> STANDARD (Some Examples)  L-CRE: Linen Cream L-WHI: Linen White  PREMIUM (Some Examples)  DL-OFF: Designer Linen Off-White VC-WHI: Vinyl Coated White	<u>ACRYLIC DIFFUSER</u> A: With Acrylic Diffuser FBD: With Fabric Diffuser NA: Without Acrylic Diffuser  Note: Fixture Diameters of 40"+ get Diffuser Risers and Finials	
<u>POWER CORD COLOR</u> STANDARD C-BLA: Black C-WHI: White					