


maratodd

L I G H T I N G

FIXTURE TYPE
FRIEDRICH SQUARE-DRUM FLEX CORD
 www.maratodd.com

FRIEDRICH

DATE	
ITEM #	MT-FRIEDRICH SQUARE-DRUM FLEX CORD
PROJECT	
COMMENTS	
PREPARED BY	

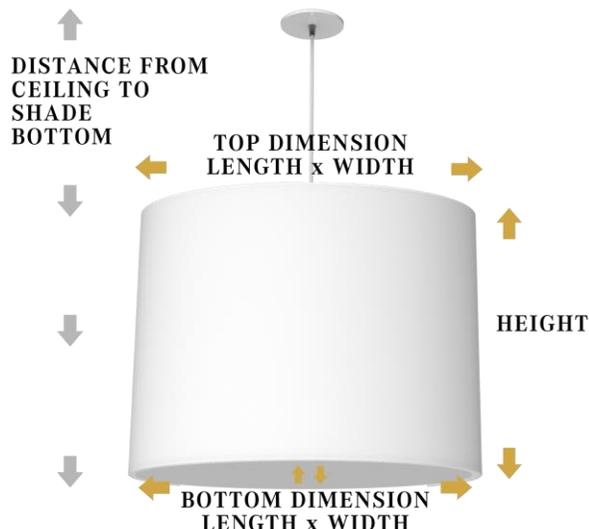

DESCRIPTION

FRIEDRICH Square Drum Pendant Light with Flex Cord Suspension Style with Optional Aircraft Cable.

SPECIFICATION FEATURES

MATERIAL / MOUNTING

Cold-rolled steel frame wire body. Matte white acrylic bottom diffuser (Optional).

SHADES

Solid cold-rolled steel construction. Material on heavy translucent white styrene with your choice of the covering's opacity.

FINISH

Standard: White (WHI)
 Premium: Nickel (NIC), Brass (BRA), Black (BLA), Ivory (IVO), Oil-Rubbed Bronze (ORB)

ACRYLIC DIFFUSER

Our standard acrylic is 7328 White with a thickness of 0.118. Custom colors are available but may impact extended lead time and standard price.

LIGHTING

Standard socket available in multiple configurations. Works with incandescent or LED bulbs.

INSTALLATION

Easy-to-install universal swivel socket to attach to standard 4" junction box. 120V power.
 Cleaning Recommendation: Use a soft cloth brush or a vacuum brush to dust the outside of the lamp shade and a clean soft white flannel cloth for the inside of the lampshade.

OPTIONS

Contact factory for NFP701 Fire Resistant or Stain Guard Fabric coating.

USAGE

Approved for interior locations only.

MODIFICATIONS

Maratodd's skilled craftspeople, with their depth of experience, offer the designer the flexibility to modify standard luminaries for project-specific solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors or decorative detailing.

ORDERING INFORMATION

Please fill in all **gold highlighted** areas for complete specification.
Pre-selected values in black may also be modified, if required.

FRIEDRICH SQUARE-DRUM FLEX CORD
SERIES
FRIEDRICH: Square-Drum Pendant Light

30 x 30	14	FC	2		
<u>SHADE TOP DIMENSION</u>	<u>SHADE HEIGHT</u>	<u>SUSPENSION STYLE</u>	<u>SOCKET</u>	<u>BRIGHTNESS</u>	
Even numbers only in inches, minimum 6" with maximum of 84"	Numbers only in inches, minimum 4" with maximum of 40"	FC: Flex Cord Only AC: Aircraft Cable Option	Single Double Triple 5-Bulb	<u>9W</u>	<u>15W</u>
30 x 30		Note: Optional on fixtures up to 38" in diameter Required on fixtures with diameter of 40"+		800 Lumens 1,600 Lumens 2,400 Lumens 4,000 Lumens	1,600 Lumens 3,200 Lumens 4,800 Lumens 8,000 Lumens
<u>SHADE BOTTOM DIMENSION</u>				<u>COLOR TEMPERATURE</u>	
Even numbers only in inches, minimum 6" with maximum of 84"				2,700K - Warm White 3,000K - Soft White	

				A
<u>POWER CORD COLOR</u>	<u>CANOPY COLOR</u>	<u>LAMPSHADE OPACITY</u>	<u>LAMPSHADE COVERING</u>	<u>ACRYLIC DIFFUSER</u>
STANDARD C-BLA: Black C-WHI: White	STANDARD WHI: White	OPAQUE: Features an interior light-blocking layer to make shade opaque. (No light passes through the sides of the shade)	STANDARD (Some Examples) L-CRE: Linen Cream L-WHI: Linen White	A: With Acrylic Diffuser FBD: With Fabric Diffuser NA: Without Acrylic Diffuser
	PREMIUM NIC: Nickel BRA: Brass BLA: Black IVO: Ivory ORB: Oil-Rubbed Bronze	TRANSLUCENT: Shade covering allows some light to shine through. Vertical bars are exposed.	PREMIUM (Some Examples) DL-OFF: Designer Linen Off-White VC-WHI: Vinyl Coated White	Note: Fixture Diameters of 40" + get Diffuser Risers and Finials
<u>POWER CORD LENGTH</u>		VERTICAL TRIM: 1/2" trim applied to shade exterior over vertical support bars to hide shadows.		
In inches, up to 192"				

MARATODD ORDERING SPECIFICATION FORM

New Fixture Name: MT – FRIEDRICH

SPECIFICATIONS

Shade Top Dimension:	30 x 30"			
Shade Bottom Dimension:	30 x 30"			
Shade Height:	14"			
Suspension Style	AC	FC	SRS	
Acrylic Diffuser Dimension	29.625" x 29.625"			
Lamping (Socket)	1 - Bulb	2 - Bulb	3 - Bulb	5 - Bulb

SUPPLEMENTALS

Attachment Style		European
	X	Slotted Disc Washer
		Sandwich European
Attachment Drop	3"	
Overall Fixture Height		
Uprights	4	
Spoke & Frame Color	Spokes:	Frame:
Support Ring	N/A	
Wire Gauge	3/16"	
Product Weight		
Inner Box		
Outer Box		
Crate Size		