


# maratodd

## L I G H T I N G

**FIXTURE TYPE**  
**MINA DRUM SWIVEL RIGID STEM**  
www.maratodd.com

### MINA

DATE	
ITEM #	Drum Pendant Light with Swivel Rigid Stem
PROJECT	
COMMENTS	
PREPARED BY	

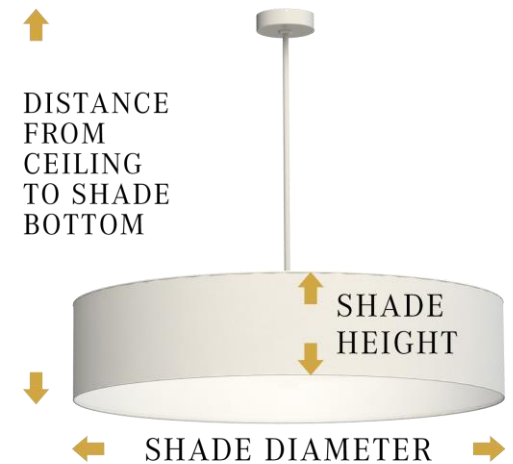

### DESCRIPTION

Drum Pendant Light with Swivel Rigid Stem Suspension Style.

### SPECIFICATION FEATURES

#### MATERIAL / MOUNTING

Cold-rolled steel frame wire body. Matte white acrylic bottom diffuser (Optional).

#### SHADES

Solid cold-rolled steel construction. Material on heavy translucent white styrene with your choice of the covering's opacity.

#### FINISH

Standard: White (WHI)  
Premium: Nickel (NIC), Brass (BRA),  
Black (BLA), Ivory (IVO), Oil-Rubbed  
Bronze (ORB)

#### ACRYLIC DIFFUSER

Our standard acrylic is 7328 White with a thickness of 0.118. Custom colors are available but may impact extended lead time and standard price.

#### LIGHTING

Standard socket available in multiple configurations. Works with incandescent or LED bulbs.

#### INSTALLATION

Easy-to-install universal swivel socket to attach to standard 4" junction box. 120V power.

Cleaning Recommendation: Use a soft cloth brush or a vacuum brush to dust the outside of the lamp shade and a clean soft white flannel cloth for the inside of the lampshade.

#### OPTIONS

Contact factory for NFP701 Fire Resistant or Stain Guard Fabric coating.

#### USAGE

Approved for interior locations only.

#### MODIFICATIONS

Maratodd's skilled craftspeople, with their depth of experience, offer the designer the flexibility to modify standard luminaries for project-specific solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors or decorative detailing.

## ORDERING INFORMATION

Please fill in all **gold highlighted** areas for complete specification.  
Pre-selected values in black may also be modified, if required.

### MINA DRUM SWIVEL RIGID STEM

#### SERIES

MINA Round Drum Pendant Light

23	7	SRS	2		
<u>TOP + BOTTOM DIAMETER</u>	<u>SHADE HEIGHT</u>	<u>SUSPENSION STYLE</u>	<u>SOCKET</u>	<u>BRIGHTNESS</u>	
Even numbers only in inches, minimum 6" with maximum of 84"	Even numbers only in inches, minimum 4" with maximum of 48"	SRS: Swivel Rigid Stem	Single	<u>9W</u> 800 Lumens	<u>15W</u> 1,600 Lumens
			Double	1,600 Lumens	3,200 Lumens
			Triple	2,400 Lumens	4,800 Lumens
			5-Bulb	4,000 Lumens	8,000 Lumens
				<u>COLOR TEMPERATURE</u>	
				2,700K - Warm White	
				3,000K – Soft White	
				<u>A</u>	
<u>DISTANCE FROM CEILING TO INNER SHADE BOTTOM</u>	<u>STEM COLOR</u>	<u>LAMPSHADE OPACITY</u>	<u>LAMPSHADE COVERING</u>	<u>DIFFUSER</u>	
In inches, up to 192"	STANDARDS ST-WHI: White	OPAQUE: Features an interior light-blocking layer to make shade opaque. (No light passes through the sides of the shade)	STANDARD (Some Examples) L-CRE: Linen Cream L-WHI: Linen White	A: With Acrylic Diffuser FBD: With Fabric Diffuser NA: Without Acrylic Diffuser	
	PREMIUM ST-NIC: Nickel ST-BRA: Brass ST-BLA: Black ST-IVO: Ivory ST-ORB: Oil-Rubbed Bronze	TRANSLUCENT: Shade covering allows some light to shine through. Vertical bars are exposed.	PREMIUM (Some Examples) DL-OFF: Designer Linen Off-White VC-WHI: Vinyl Coated White	Note: Fixture Diameters of 40" + get Diffuser Risers and Finials	
	<u>CANOPY COLOR</u>				
	STANDARD WHI: White				
	PREMIUM NIC: Nickel BRA: Brass BLA: Black IVO: Ivory ORB: Oil-Rubbed Bronze	VERTICAL TRIM: 1/2" trim applied to shade exterior over vertical support bars to hide shadows.			