

# maratodd

## L I G H T I N G


**FIXTURE TYPE**  
**BACH DRUM FLEX CORD**  
www.maratodd.com

### BACH

DATE	
ITEM #	Drum Pendant Light with Flex Cord
PROJECT	
COMMENTS	
PREPARED BY	

### DESCRIPTION

Drum Pendant Light with Flex Cord Suspension Style.

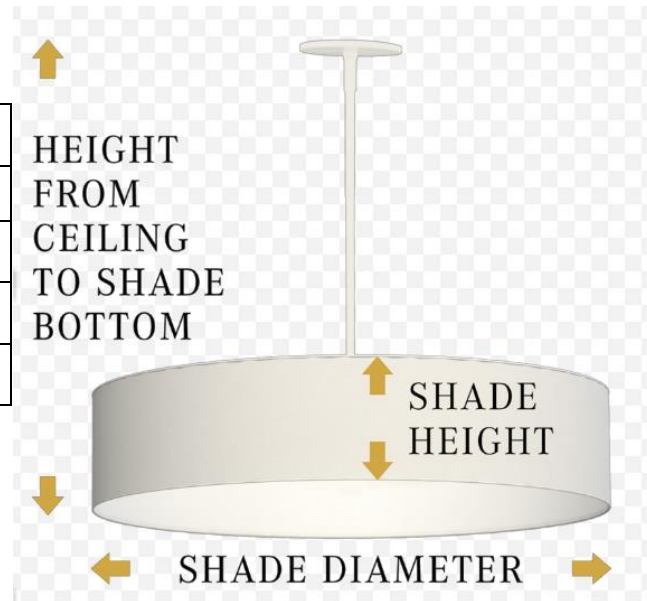

### SPECIFICATION FEATURES

#### MATERIAL / MOUNTING

Cold-rolled steel frame wire body. Matte white acrylic bottom diffuser (Optional).

#### SHADES

Solid cold-rolled steel construction. Material on heavy translucent white styrene with your choice of the covering's opacity.

#### FINISH

Standard: White (WHI)  
Premium: Nickel (NIC), Brass (BRA), Black (BLA), Ivory (IVO), Oil-Rubbed Bronze (ORB)

#### ACRYLIC DIFFUSER

Our standard acrylic is 7328 White with a thickness of 0.118. Custom colors are available but may impact extended lead time and standard price.

#### LIGHTING

Standard socket available in multiple configurations. Works with incandescent or LED bulbs.

#### INSTALLATION

Easy-to-install universal swivel socket to attach to standard 4" junction box. 120V power.

Cleaning Recommendation: Use a soft cloth brush or a vacuum brush to dust the outside of the lamp shade and a clean soft white flannel cloth for the inside of the lampshade.

#### OPTIONS

Contact factory for NFP701 Fire Resistant or Stain Guard Fabric coating.

#### USAGE

Approved for interior locations only.

#### MODIFICATIONS

Maratodd's skilled craftspeople, with their depth of experience, offer the designer the flexibility to modify standard luminaries for project-specific solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors or decorative detailing.

## ORDERING INFORMATION

Please fill in all **gold highlighted** areas for complete specification.  
Pre-selected values in black may also be modified, if required.

BACH DRUM FLEX CORD				
S E R I E S				
BACH Round Drum Pendant Light				
30	4	FC	5	
<u>TOP + BOTTOM</u> <u>DIAMETER</u>	<u>SHADE HEIGHT</u>	<u>SUSPENSION</u> <u>STYLE</u>	<u>SOCKET</u>	<u>BRIGHTNESS</u>
Even numbers only in inches, minimum 6" with maximum of 84"	Even numbers only in inches, minimum 4" with maximum of 48"	FC : Flex Cord		<u>9W</u> 800 Lumens <u>15W</u> 1,600 Lumens 1,600 Lumens 3,200 Lumens 2,400 Lumens 4,800 Lumens 4,000 Lumens 8,000 Lumens
			Single	
			Double	
			Triple	
			5-Bulb	
				<u>COLOR TEMPERATURE</u>
				2,700K - Warm White
				3,000K – Soft White
				A
<u>CORD LENGTH</u>	<u>CORD COLOR</u>	<u>LAMPSHADE</u> <u>OPACITY</u>	<u>LAMPSHADE</u> <u>COVERING</u>	<u>DIFFUSER</u>
In inches, up to 192"	3/8" Round Steel			
	STANDARD	OPAQUE:	STANDARD	A: With Acrylic
	ST-WHI: White	Features an interior light-blocking layer to make shade opaque. (No light passes through the sides of the shade)	(Some Examples)	Diffuser
	PREMIUM		L-CRE: Linen Cream	FBD: With Fabric
	ST-NIC: Nickel		L-WHI: Linen White	Diffuser
	ST-BRA: Brass			NA: Without Acrylic
	ST-BLA: Black		PREMIUM	Diffuser
	ST-IVO: Ivory		(Some Examples)	
	ST-ORB: Oil-Rubbed Bronze	TRANSLUCENT:	DL-OFF: Designer	Note: Fixture
		Shade covering allows some light to shine through. Vertical bars are exposed.	Linen Off-White	Diameters of 40" + get
	<u>CANOPY COLOR</u>		VC-WHI: Vinyl Coated White	Diffuser Risers and
	STANDARD			Finials
	WHI: White	VERTICAL TRIM:		
	PREMIUM	1/2" trim applied to shade exterior over vertical support bars to hide shadows.		
	NIC: Nickel			
	BRA: Brass			
	BLA: Black			
	IVO: Ivory			
	ORB: Oil-Rubbed Bronze			