

maratodd

L I G H T I N G

FIXTURE TYPE
BEATE TAPERED DOUBLE TIER
SWIVEL RIGID STEM
www.maratodd.com

BEATE

DATE	
ITEM #	MT-BEATE
PROJECT	
COMMENTS	
PREPARED BY	

DESCRIPTION

BEATE Round Tapered Double Tier Pendant Light with Swivel Rigid Stem Suspension Style.

SPECIFICATION FEATURES

MATERIAL / MOUNTING

Cold-rolled steel frame wire body. Matte white acrylic bottom diffuser (Optional).

SHADES

Solid cold-rolled steel construction. Material on heavy translucent white styrene with your choice of the covering's opacity.

FINISH

Standard: White (WHI)
Premium: Nickel (NIC), Brass (BRA),
Black (BLA), Ivory (IVO), Oil-Rubbed
Bronze (ORB)

ACRYLIC DIFFUSER

Our standard acrylic is 7328 White with a thickness of 0.118. Custom colors are available but may impact extended lead time and standard price.

LIGHTING

Standard socket available in multiple configurations. Works with incandescent or LED bulbs.

INSTALLATION

Easy-to-install universal swivel socket to attach to standard 4" junction box. 120V power.

Cleaning Recommendation: Use a soft cloth brush or a vacuum brush to dust the outside of the lamp shade and a clean soft white flannel cloth for the inside of the lampshade.

OPTIONS


Contact factory for NFP701 Fire Resistant or Stain Guard Fabric coating.

USAGE

Approved for interior locations only.

MODIFICATIONS

Maratodd's skilled craftspeople, with their depth of experience, offer the designer the flexibility to modify standard luminaries for project-specific solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors or decorative detailing.

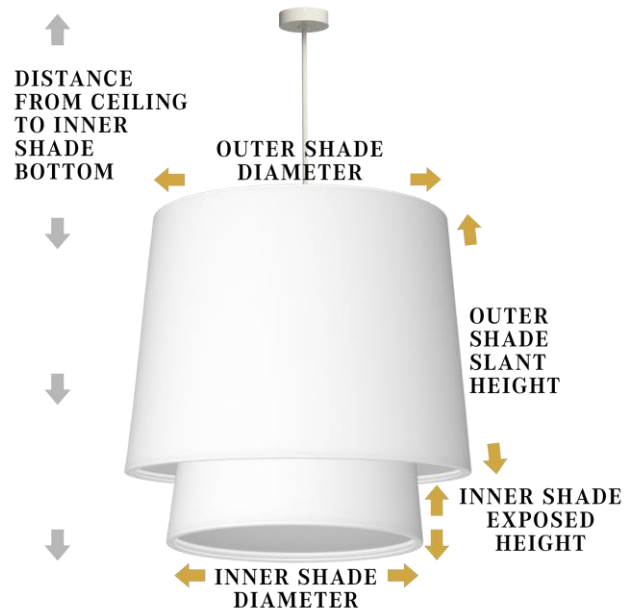

ORDERING INFORMATION

Please fill in all **gold highlighted** areas for complete specification.
Pre-selected values in black may also be modified, if required.

BEATE TAPERED DOUBLE TIER SWIVEL RIGID STEM

SERIES

BEATE: Round Tapered Double Tier Pendant Light

40	14	SRS	5	
<u>OUTER SHADE TOP DIAMETER</u>	<u>OUTER SHADE SLANT HEIGHT</u>	<u>SUSPENSION STYLE</u>	<u>SOCKET</u>	<u>BRIGHTNESS</u>
42	6	SRS: Swivel Rigid Stem		
<u>OUTER SHADE BOTTOM DIAMETER</u>	<u>INNER SHADE EXPOSED HEIGHT</u>		<u>9W</u>	<u>15W</u>
36	Even numbers only in inches, minimum 4” with maximum of 48”		Single	800 Lumens
			Double	1,600 Lumens
			Triple	2,400 Lumens
			5-Bulb	4,000 Lumens
34				
<u>INNER SHADE BOTTOM DIAMETER</u>				<u>COLOR TEMPERATURE</u>
Even numbers only in inches, minimum 6” with maximum of 84”				2,700K – Warm White
				3,000K – Soft White
<u>DISTANCE FROM CEILING TO INNER SHADE BOTTOM</u>	<u>STEM COLOR</u>	<u>LAMPSHADE OPACITY</u>	<u>LAMPSHADE COVERING</u>	<u>ACRYLIC DIFFUSER</u>
In inches, up to 192”	3/8” Round Steel	OPAQUE: Features an interior light- blocking layer to make shade opaque. (No light passes through the sides of the shade)	(Some Examples) L-CRE: Linen Cream L-WHI: Linen White	A: With Acrylic Diffuser FBD: With Fabric Diffuser NA: Without Acrylic Diffuser
	STANDARD ST-WHI: White PREMIUM ST-NIC: Nickel ST-BRA: Brass ST-BLA: Black ST-IVO: Ivory ST-ORB: Oil-Rubbed Bronze	TRANSLUCENT: Shade covering allows some light to shine through. Vertical bars are exposed.	PREMIUM (Some Examples) DL-OFF: Designer Linen Off-White VC-WHI: Vinyl Coated White	Note: Fixture Diameters of 40”+ get Diffuser Risers and Finials
	<u>CANOPY COLOR</u> STANDARD WHI: White PREMIUM NIC: Nickel BRA: Brass BLA: Black IVO: Ivory ORB: Oil-Rubbed Bronze	VERTICAL TRIM: 1/2” trim applied to shade exterior over vertical support bars to hide shadows.		