


# LUMA SHADE

FIXTURE  
TYPE

DETROIT

155 West 3rd St • New Richmond, WI 54017  
p: 715.246.2233 f: 715.246.2243  
www.maratodd.com

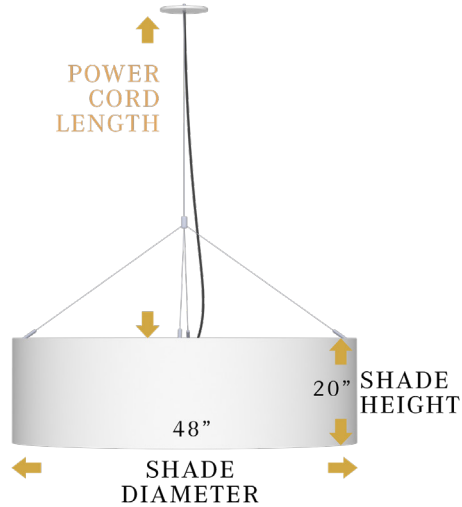

## DETROIT

DATE	
ITEM #	LS-DETROIT
PROJECT	
COMMENTS	
PREPARED BY	

## DESCRIPTION

Lumashade Round Drum Pendant Light

## SPECIFICATION FEATURES

### CONSTRUCTION

1/4" steel wireframe, painted for optimum reflectivity.  
Power source located on-board or remote in ceiling.  
Cable mount suspension system (supplied).

### LIGHT SOURCE

Proprietary epoxy encased light emitting diode round disc.  
**NO. LEDs AND LIGHT OUTPUT**  
8" Round Disc (87 LEDs) - 1,800 Max Lumens  
16" Round Disc (192 LEDs) - 4,000 Max Lumens  
24" (440 LEDs) and 32" (446) Round Disc - 9,000 Max Lumens

### COLOR RENDERING INDEX

>75  
**MAXIMUM WATTAGE**  
8" Round Disc - 18.2W  
16" Round Disc - 40W  
24" and 32" Rounds Disc - 90W

### ENVIRONMENT

Dry or Damp  
**AMBIENT TEMPERATURE**  
22°F - 122°F

### CONTROLLER

MW UL Approved (>20W, >40W or >90W depending on LED disc selected).

### CERTIFICATIONS

CE, RoHS, FCC, IP-67

### INSTALLATION

Easy-to-install. Attaches to standard 4" junction box. 120V power.  
Cleaning Recommendation: Use a soft cloth brush or a vacuum brush to dust the outside of the lamp shade and a clean soft white flannel cloth for the inside of the lampshade.

### USAGE

Approved for interior locations only.

### MODIFICATIONS

Lumashade's skilled craftspeople, with their depth of experience, offer the designer the flexibility to modify standard luminaires for project specific solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors or decorative detailing.

# ORDERING INFORMATION

Please fill in all **blue highlighted** areas for complete specification. Preselected values may also be modified, if required.

DETROIT

SERIES

DETROIT: Lumashade Round  
Drum Pendant Light

**48**

**20**

**AC**

SHADE  
DIAMETER

**IN INCHES**

6, 8, 10, 12, 14, 16, 18, 20,  
22, 24, 26, 28, 30, 32, 34,  
36, 38, 40, 42, 44, 46, 48,  
50, 52, 54, 56, 58, 60, 62

SHADE  
HEIGHT

**IN INCHES**

6, 8, 10, 12, 14, 16, 18, 20,  
22, 24, 26, 28, 30, 32, 34,  
36, 38, 40, 42, 44, 46, 48,  
50, 52, 54, 56, 58, 60, 62

SUSPENSION  
STYLE

**SRS:** Swivel Rigid Stem

**FS:** Fixed Stem

**FC:** Flex Cord

**AC:** Aircraft Cable  
with Flex Cord

CANOPY  
COLOR

**STANDARD**

**WHI:** White

**PREMIUM:**

**NIC:** Nickel

**BRA:** Brass

**BLA:** Black

**IVO:** Ivory

**ORB:** Oil-Rubbed Bronze

**A**

**32**

POWER  
CORD  
COLOR

**STANDARD**

**C-BLA:** Black

**C-WHI:** White

LAMPSHADE  
OPACITY

**OPAQUE:**

Features an interior  
light-blocking layer to  
make shade opaque.  
(No light passes  
through the sides of  
the shade)

**TRANSLUCENT:**

Shade covering allows  
some light to shine  
through.

LAMPSHADE  
COVERING

**STANDARD**

**(Some Examples)**

**L-CRE:** Linen Cream

**L-WHI:** Linen White

**PREMIUM**

**(Some Examples)**

**DL-OFF:** Designer

Linen Off-White

**VC-WHI:** Vinyl

Coated White

ACRYLIC  
DIFFUSER

**A:** With Acrylic  
Diffuser

**NA:** Without  
Acrylic Diffuser

LUMA DISC  
SIZE

**8:** 8" Luma Disc

**16:** 16" Luma Disc

**24:** 24" Luma Disc

**32:** 32" Luma Disc

POWER  
CORD  
LENGTH

**IN FEET**

4, 8, 12, 16

DIMMING

**N:** No Dimming

**0-10V:** 0-10V  
PWM Dimming

**RC:** Remote  
Control Dimming

COLOR  
TEMPERATURE

**3K:** Warm White

**4K:** Neutral White