


maratodd

L I G H T I N G

FIXTURE TYPE

HUGO

155 West 3rd St • New Richmond, WI 54017
p: 715.246.2233 f: 715.246.2243
www.maratodd.com

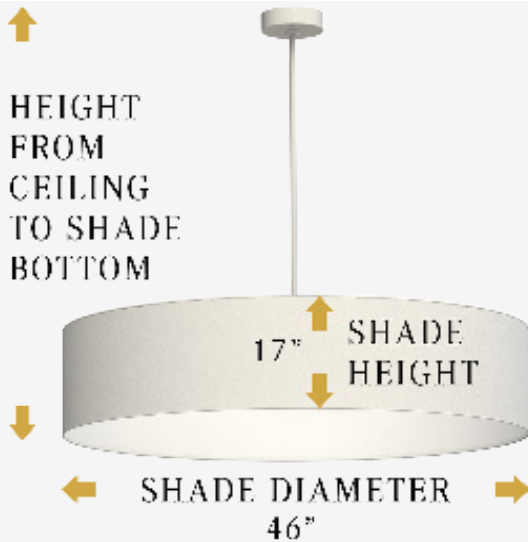

HUGO

DATE	
ITEM #	MT-HUGO
PROJECT	
COMMENTS	
PREPARED BY	

DESCRIPTION

Round Drum Pendant Light

SPECIFICATION FEATURES

MATERIAL / MOUNTING

Cold-rolled steel frame wire body.
Matte white acrylic bottom diffuser (Optional).

SHADES

Solid cold-rolled steel construction.
Material on heavy translucent white styrene with your choice of the coverings opacity.

FINISH

Standard: White (WHI)
Premium: Nickel (NIC), Brass (BRA), Black (BLA), Ivory (IVO), Oil-Rubbed Bronze (ORB)

ACRYLIC DIFFUSER

Our standard acrylic is 7328 White with a thickness of 0.118. Custom colors are available, but may impact extended lead time and standard price.

LIGHTING

5-way, standard socket cluster. Works with incandescent or LED bulbs.

INSTALLATION

Easy-to-install universal swivel socket to attach to standard 4" junction box. 120V power.

Cleaning Recommendation: Use a soft cloth brush or a vacuum brush to dust the outside of the lamp shade and a clean soft white flannel cloth for the inside of the lampshade.

OPTIONS

Contact factory for NFP701 Fire Resistant or Stain Guard Fabric coating.

USAGE

Approved for interior locations only.

MODIFICATIONS

Maratodd's skilled craftspeople, with their depth of experience, offer the designer the flexibility to modify standard luminaries for project-specific solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors or decorative detailing.

ORDERING INFORMATION

Please fill in all **gold highlighted** areas for complete specification.
Pre-selected values may also be modified, if required.

HUGO

SERIES

HUGO: Round Drum
Pendant Light

4 6

1 7

S R S

SHADE DIAMETER

IN INCHES

6, 8, 10, 12, 14, 16,
18, 20, 22, 24, 26,
28, 30, 32, 34, 36,
38, 40, 42, 44, 46,
48, 50, 52, 54, 56,
58, 60

SHADE HEIGHT

IN INCHES

6, 8, 10, 12, 14, 16,
18, 20, 22, 24, 26,
28, 30, 32, 34, 36,
38, 40, 42, 44, 46,
48, 50, 52, 54, 56,
58, 60

CANOPY TYPE

SRS: Swivel Rigid Stem

FS: Fixed Stem

FC: Flex Cord

AC: Aircraft Cable with
Flex Cord

CANOPY COLOR

STANDARD

WHI: White

PREMIUM

NIC: Nickel

BRA: Brass

BLA: Black

IVO: Ivory

ORB: Oil-Rubbed Bronze

STEM COLOR

3/8" Round Steel

STANDARD

ST-WHI: White

PREMIUM

ST-NIC: Nickel

ST-BRA: Brass

ST-BLA: Black

ST-IVO: Ivory

ST-ORB: Oil-Rubbed
Bronze

A

5

HEIGHT FROM CEILING TO SHADE BOTTOM

IN INCHES

Specify the Length

6, 8, 12, 14, 16, 18, 20,
22, 24, 26, 28, 30, 32, 34,
36, 38, 40, 42, 44, 46, 48,
or CUSTOM

CUSTOM: Enter Actual
Measurement in Inches

LAMP SHADE OPACITY

OPAQUE:

Features an interior
light-blocking layer to
make shade opaque. (No
light passes through the
sides of the shade)

TRANSLUCENT:

Shade covering allows
some light to shine
through. Vertical bars
are exposed.

VERTICAL TRIM:

1/2" trim applied to
shade exterior over
vertical support bars to
hide shadows.

LAMP SHADE COVERING

STANDARD
(Some Examples)

L-CRE: Linen Cream

L-WHI: Linen White

PREMIUM
(Some Examples)

DL-OFF: Designer Linen
Off-White

VC-WHI: Vinyl Coated
White

ACRYLIC DIFFUSER

A: With Acrylic
Diffuser

FBD: With Fabric
Diffuser

NA: Without
Acrylic Diffuser

LAMPING

Specify Number of
Light Sockets

1, 2, 3, 5

BULBS

Number of Bulbs
Depends on Socket

9W2700:

800 Lumens 2,700K

15W2700:

1,600 Lumens 2,700K

NA: No Bulbs